


## HFX Series fuel filter

Housings for service with gasoline, diesel, biodiesel ad more.

Construction material: X5CrNi18-10, SS 304 and Viton gaskets

For use with 6" OD cartridge, microfilter element, monitor element or absorption element  
3 sizes, for filter element lengths 368, 727 and 1099 mm and ID 3"

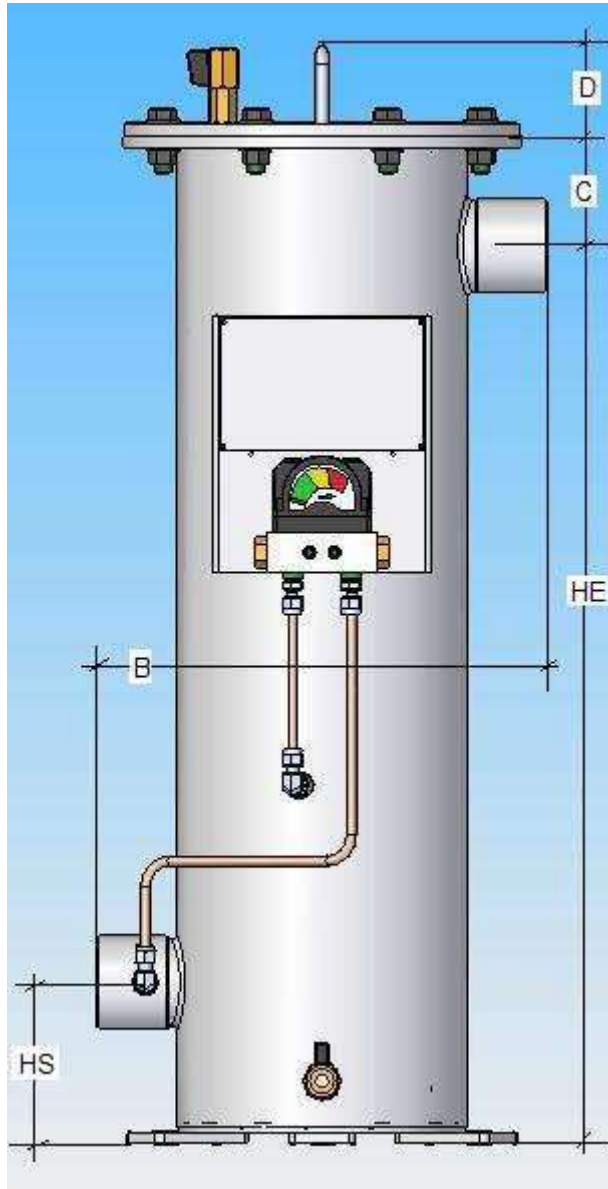

### General dimensions, mm.

B	I/O	2" BSP	340
	I/O	3" BSP	340
	I/O	3" Flanged	440
HS			122
HE	Size 368		682
	Size 727		1044
	Size 1099		1406
C			83
D			69

Service pressure up to 0.6 MPa

### Accessories included:

- Differential pressure gauge.
- Emptied valve.
- Vent valve.
- Anchorage plates (3)

### Options:

- Automatic vent valve.
- Differential pressure gauge switch.
- In line I/O connections (below)
- Service pressure up to 1 or 1.6 MPa

### Design:

- EN13445 as standard
- ASME VIII Div. 1
- PD5500
- And more

Available housings for lager flows and/or cartridges with other dimensions

**Filtration experts since 1984**

Data and information is for reference only, and may vary depending on specific application

Hispano Europea de Comercio e Industria S.L.

Calidad, 24 - Pol. Los Olivos - 28906 Getafe (Madrid) España

Tel. (34) 916 967 039 Fax (34) 916 950 352

e-mail: sales@hecisa.com <http://www.hecisa.com>

